




Monarfloor Deck 22

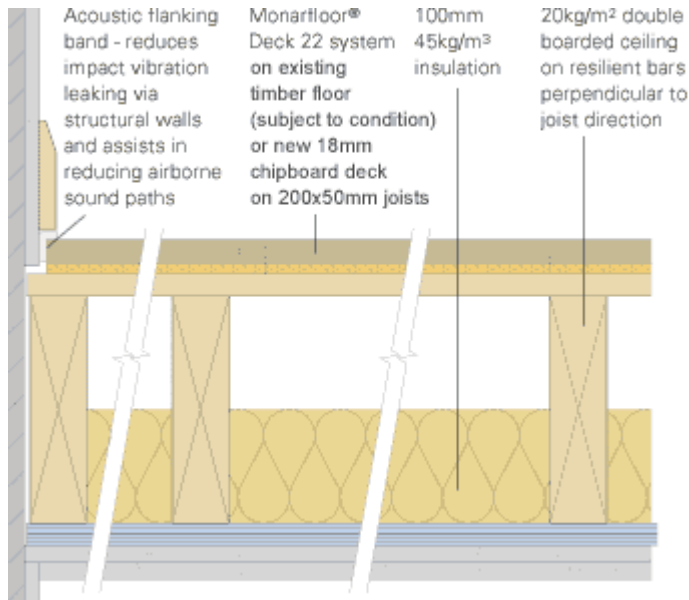

Description

Monarfloor Deck 22 system is designed to reduce sound transmission through existing timber floors in situations where finished floor height is not critical. Monarfloor Deck 22 consists of a layer of 8mm LRAC foam bonded to 22mm P5 V313 moisture resistant chipboard. When installed as part of a complete sound reduction system it enables a timber floor to meet the sound transmission regulations of Part E.

Specification

Monarfloor Deck 22 Sound Transmission Performance:

Treated floor: (Timber subfloor)

DnT,w + Ctr: 50dB

L[´]nT,w: 50dB

Monarfloor Deck 22 Product Data

Overall board dimensions: 2400mm x 600mm x 30mm thick

Foam thickness: 8mm

Foam composition: Recycled Low Resonance type II Acoustic Chip (LRAC) foam

Associated products

The Sound Solution, Unit 2 Carr House Farm, Poole Lane, Nun Monkton, York, YO26 8EH

Tel: 01423 339 163 Fax: 01423 339 153 Email: info@noisestopsystems.co.uk

www.noisestopsystems.co.uk, VAT No. GB 708 5104 53



Noise Stop Isolation Tape
Dense Fibre Matting