


## Specification Sheet

### NSSW2+ Wall Panel

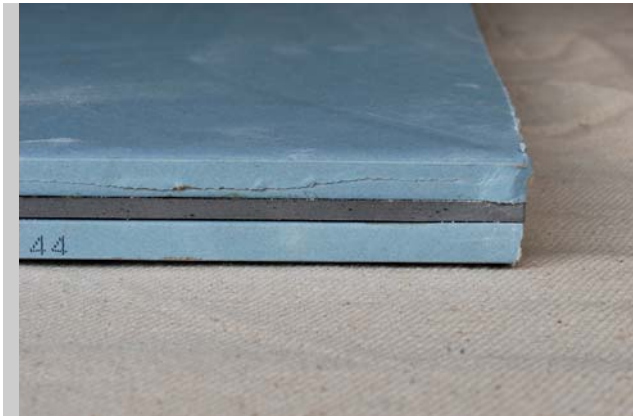

- **30mm Thickness**
- **Includes a layer of high density rubber**
- **Ready to skim**
- **1200mm x 1200mm**

#### **Product Description:**

The NSSW2+ Wall Panel consists of two layers of laminated acoustic mineral board of 12.5mm and one layer of high density sound reductive rubber membrane of 5mm. The board dimensions are 1200mm x 1200mm and cover an area of 1.44 square meters. Each board weighs 38kg.

The NSSW2+ panel has been designed to be used as a direct to wall panel, however can be incorporated within our wall options 1 and 2 or used on to any batten system or used in conjunction with our Sound Breaker Bars.

Once the board is fixed in place the board can be skimmed or dry lined depending on the required finish. We can provide full installation guides for any of our materials.

This panel can go towards achieving compliance with the Building Regulations Part E when used as part of our recommended systems.

#### **Product Data:**

<b>Size</b>	<b>1200mm x 1200mm</b>
<b>Depth</b>	<b>30mm</b>
<b>Weight</b>	<b>38kg</b>
<b>Covers An Area Of</b>	<b>1.44m<sup>2</sup></b>