

## TRISO-SUPER 10



### Description

Ideal for over rafter, under rafter, attic conversions, and dormer applications. Suitable for new and refurbishment projects.


TRISO-SUPER 10 has been tested under real conditions by TRADA Technology Ltd and certified as equivalent to 210mm of mineral wool when installed in a pitched roof application by BM TRADA Certification Ltd. (Certificate no. 0102 dated 03 April 2006). Please see the special notice on page 6 of this brochure for more information.

- 19 components: Number of reflective foils: 8
- 2 external reflective foils with reinforcing mesh Surface weight: 600g/m<sup>2</sup>
  - 3 wadding layers Thickness: 30mm approx.
  - 8 foam layers
  - 6 internal reflective foils

### Other Advantages

- Efficient both in summer and winter.
- Space saving - 30mm thick!
- Quick and easy to install.
- Flexible - can fit the most difficult of roofs.
- Durable - will not sag, moisture resistant.
- Non-irritant, hypoallergenic.

PROPERTIES		VALUE	REFERENCE STANDARD
Acoustic Insulation			
Insulation against impact noise		$\Delta I = 21 \text{ dB}$	
Mechanical Resistance			
- Breaking strength	Weft	> 500N	EN ISO 13934-1
	Warp	> 400N	
- Tear strength	Warp	> 60N	EN ISO 13937-2
	Weft	> 60N	
PACKAGING		20m <sup>2</sup>	
Width		1.60m	

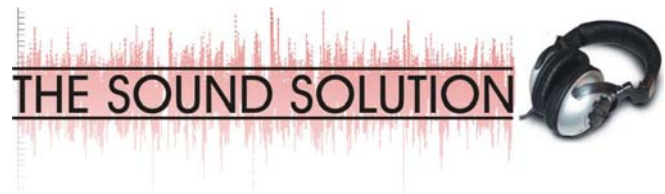

Length	12.50m	
Weight (per roll approx.)	10kg	

**Associated products:**

Triso Sols

Triso Isolation Tape