




## How to install Noisestop F7

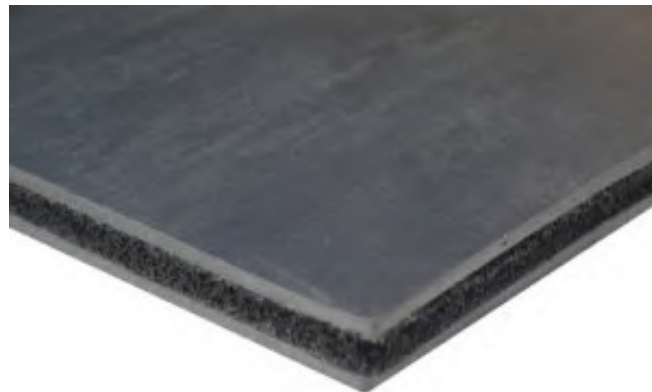

## Product Fitting Guide

### Noisestop F7 acoustic underlay

#### ***Floor soundproofing acoustic underlay mats for domestic and commercial floors***

Noisestop Systems F7 is an acoustic underlay that can be used over any floor type. Noisestop F7 is suitable for use in domestic and commercial applications. Reduce impact and airborne noise, conversation and TV noise transferring through timber sub floors. Part 'e' complaint when installed as part of a separating floor construction.

#### ***Fitting Noisestop F7***

Acoustic underlay mats should be laid in a brick bond pattern on the floor. When you are fitting the mats make sure you don't leave gaps between them. Ensure the matting is tightly butted together.

Use a Stanley knife or sharp scissors to cut the soundproof matting to fit the shape of your room.

#### **Fitting Noisestop F7 below carpet**

Noisestop F7 should be combined with perimeter edging strips around the room if you are using a carpet underlay over the soundproof mat. If you are not using a carpet underlay and grippers you will not need to use the edging strips.

Perimeter strips should be nailed or glued to the floor before you install the gripper rods. The gripper rods are then nailed on to the perimeter strips. The Noisestop F7 is then laid in a brick bond pattern over the floor. Ensure that no gaps are left between the acoustic mats and the perimeter strips and between the acoustic matting sheets.

#### **Fitting Noisestop F7 to stairs**

Fitting the Noisestop F7 to the stairs should be combined with perimeter strips. The strips are nailed or glued in place before the gripper rods are attached. Once you have cut the mats to size they should be glued in place with a floor grade adhesive.

#### **Complying with Building Regulations**

If you are fitting an acoustic underlay in order to comply with Building Regulations you will need to fix the mats to the sub floor with a floor grade adhesive.

There is no requirement to fix this product to the sub floor if you are carrying out any other domestic or commercial applications. Unless you are carrying out work to comply with the Building Regulations you do not need to fix the acoustic underlay to the floor.



Restore peace & quiet with Noisestop Systems

## **Fitting Noisestop F7 in kitchens and bathrooms**

When you are installing an acoustic underlay in kitchens and bathrooms the units should not be sat on the matting. To ensure the correct floor heights the units should be sat on ply wood or MDF, this will ensure the same floor height throughout. In kitchens lay the acoustic mats up to the kitchen plinth; lay the underlay below the units to reduce airborne sound transfer. For bathrooms ensure toilets and sinks are raised to ensure the correct floor height.

### **Please note**

We would always recommend that you check with your flooring company to check the suitability of the final floor finish with any acoustic underlay. Due to the number of different floor finishes available it is not always possible to check the suitability of the product with every floor finish.

If you need any help regarding products or how they are fitted, call 01423 339163.