

# Product Information


## Noisestop 2+ Panel



The Noisestop 2+ soundproof panel is part of the Noisestop direct to wall soundproofing range. Increase the sound insulation of walls using this soundproof board. It bonds directly to walls using plasterboard adhesive. This panel can also be screwed on to stud frames and ceiling joists. By applying this panel to the separating structure, it reduces airborne sound transfer between rooms. The mass loaded barrier centre of this panel blocks sound and reduces vibration through the panel, reducing sound transfer up to 48dB. Plaster skim or tape and fill the edges to finish.

## Product information

- Size 1200mm x 1200mm
- Thickness 30mm
- Weight 46kg
- Soundproofing walls and ceilings
- 1 hour fire rating
- Two layers of 12.5m acoustic plasterboard
- 5mm layer of mass loaded barrier mat

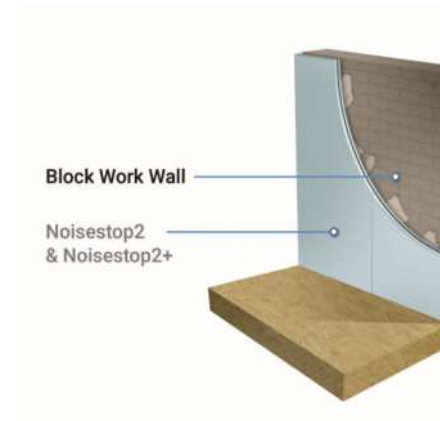

## Fitting

- Noisestop soundproof panels can be cut to size using hand tools. Use a hand saw or stanley knife to cut the boards. If you have power tools, then you can use them to cut the boards.
- Use plasterboard adhesive to bond the panels directly on to wall surfaces. Attach to ceiling joists or stud frames with dry wall screws or universal screws.
- Noisestop soundproofing panels are all manufactured with an acoustic plasterboard. They are ready to be plastered or the tapered edge can be taped and filled.