


Product Information


Noisestop Acoustic Panel

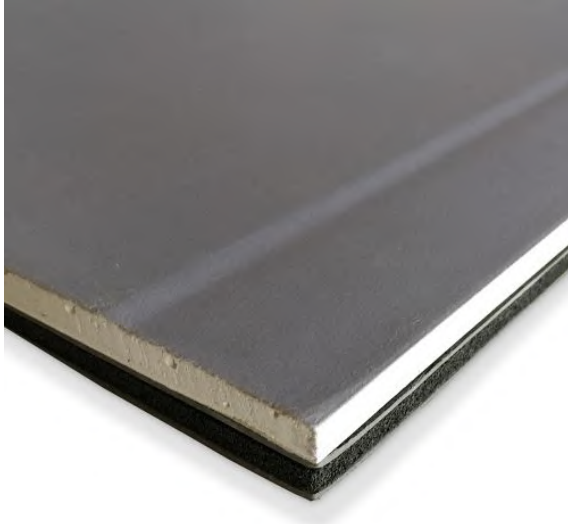

Noisestop Acoustic Panel soundproofing for walls and ceilings. A high performing stand alone soundproof panel that is applied directly to walls, for soundproofing without compromising living space. Use this product on its own or as part of a combination of soundproof materials to form acoustic wall and ceiling solutions. Applied to walls and ceilings to reduce unwanted airborne noise from noisy neighbours. Compliant with Part E for separating walls. Noise reduction up to 50dB.

Product information

- Size 1200mm x 1200mm
- Thickness 22.5mm
- Weight 29kg
- Soundproofing walls and ceilings
- 30 minute fire rating
- 12.5m acoustic plasterboard (½ hour fire rated)
- 10mm acoustic barrier combining two layers of 2.5mm mass loaded barrier mats and a 5mm acoustic foam

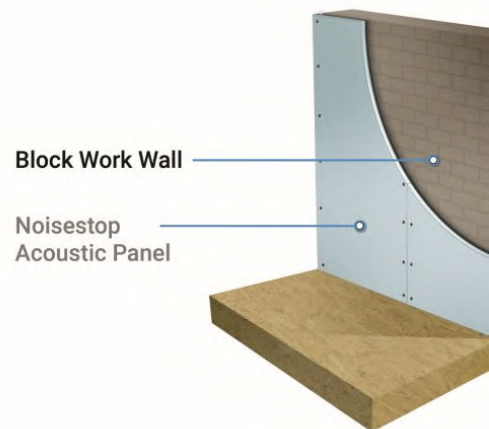

Fitting

- Noisestop soundproof panels can be cut to size using hand tools. Use a hand saw or Stanley knife to cut the boards. If you have power tools then you can use them to cut the boards.
- Use a strong adhesive to bond the panels directly to finished walls. Use Smart Tack adhesive for fixing straight to walls. Attach the panels to ceilings, stud work or soundbreaker bars with screws.
- Noisestop soundproofing panels are all manufactured with an acoustic plasterboard, they are ready to be plastered or the tapered edge can be taped and filled.