



Noisestop F7

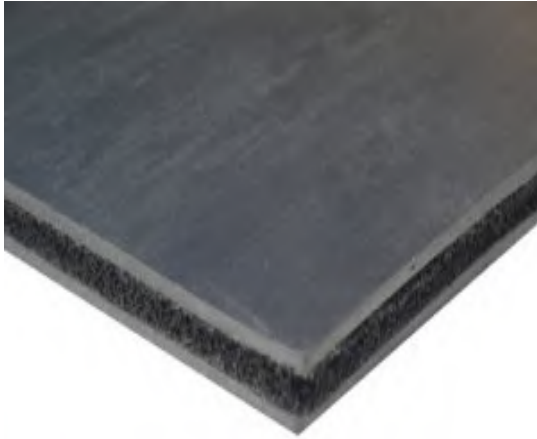

Noisestop F7 acoustic underlay is predominantly used below floors with a carpet finish. Lay over any floor type to achieve airborne and impact sound reduction through separating floors. Part E compliant with Building Regulations for separating floors. Soundproof floors in houses and flats and reduce unwanted sound transfer through the floor. Quick and easy to lay this acoustic underlay stops the sound of footfall, moving furniture, conversation and TV noise through the floor.

Product information

- Size 1200mm x 1200mm
- Thickness 10mm
- Weight 13kg
- Soundproofing floors
- 2.5mm mass loaded barrier layer (two layers)
- 5mm acoustic grade foam

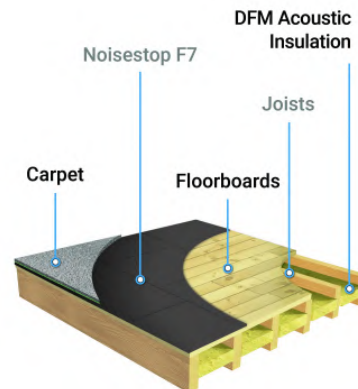

Fitting

- Cut the material with a stanley knife or sharp scissors.
- Loose lay the Noisestop F7 to floors in a brick bond formation, use a floor grade adhesive to stick the mats down for Part E. Not required for domestic soundproofing. Ensure all the edges are butted together.
- The edges of the mats can be taped down using a heavy-duty masking tape.
- Butt the matting up to skirting boards or below them if you are installing hard floor finishes over the top.
- If you are combining with carpet underlay and gripper rods you will need to use perimeter strips around the edge of the room.