


## DATA SHEET

### NOISESTOP ACOUSTIC PANEL

#### Description

The Noisestop Acoustic Panel is a slim fit soundproofing solution, suitable for use on walls and ceilings. Combining a 12.5mm acoustic plasterboard bonded to a 10mm layer of two mass loaded vinyl sheets and a 5mm acoustic foam layer.

- Size 1200mm x 1200mm
- Thickness 22.5mm
- Weight 33kg
- Direct to wall application
- Upgrade stud walls and ceilings

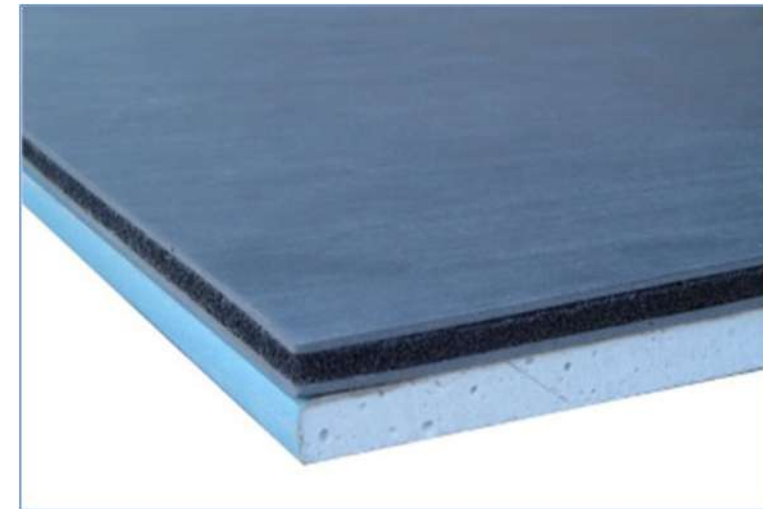

Noisestop Acoustic Panel

#### Installation

- Remove skirting, electrics and coving.
- Mechanically fix to solid walls with plugs and screws, alternatively use a strong bonding adhesive to stick to flat surfaces.
- Attach the Noisestop Acoustic Panel to ceiling joists, stud frames or soundbreaker bars using universal screws, or dry wall screws.
- Leave a 3-5mm gap around the perimeter of the wall/ceiling to be filled with acoustic sealant. A bead of sealant should be used between each board.
- Plaster skim to finish or tape and fill the tapered edges.

