

DATA SHEET

NOISESTOP F7+

Description

The Noisestop F7+ mat is a 15mm thick floor soundproofing solution for timber and concrete floors. Combining two layers of 9lb chip foam and a 5mm mass loaded vinyl sheet centre, to create an acoustic underlay for use in domestic and commercial applications. Predominantly laid under hard floors, engineered flooring, tiles and laminates. Part E compliant.


- Size 1200mm x 600mm
- Thickness 15mm
- Weight 9kg
- Timber & concrete solution
- Impact and airborne noise



Noisestop F7+

Installation

- Ensure any holes in wooden floors are sealed before laying the mats.
- Loose lay the Noisestop F7 in a brick bond formation, use a floor grade adhesive to stick the mats down for Part E. Not required for domestic soundproofing.
- Install perimeter strips around the edge of the room if using the Noisestop F7+ with a carpet underlay, this ensure the carpet gripper rods are the correct height.
- The edges of the mats can be taped down using a heavy-duty masking tape.
- Part E compliant when combined with the correct ceiling construction. Double boarded ceiling on soundbreaker bars, joists filled with 100mm/60kg insulation.

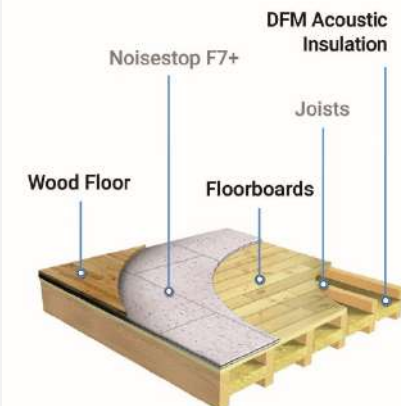

Noisestop Systems LLP | Unit 2 Carr House Farm, Nun Monkton, York, YO26 8EH | Sales & Enquiries 01423 339163

www.noisestopsystems.co.uk | info@noisestopsystems.co.uk